



Also available...



Independence Steplift Range
...the next generation in 1 metre step lift access



Elevators.ie
6F. Unit 6
KCR Estate
Dublin 12
+353 (0) 1 514 3766
info@elevators.ie
www.elevators.ie

NOTE: Specification is correct at time of print and is subject to change as part of our ongoing Research and Development progra

m.

reaching new heights

the *NEW* Steplift
takes you further

3 metre Independence Steplift



3m Independence Steplift

the *NEW* access solution that *takes you further*

The new Independence Steplift model raises the user up to a maximum 3 metres while continuing to provide strength, modern aesthetics and configuration options.

3 PLATFORM SIZES

800W


PLATFORM: 800 x 1400mm
FOOTPRINT: 1110 x 1660mm
GATE CLEARWAY: 800mm

900W

PLATFORM: 900 x 1400mm
FOOTPRINT: 1210 x 1660mm
GATE CLEARWAY: 900mm


1100W

PLATFORM: 1100 x 1400mm
FOOTPRINT: 1410 x 1660mm
GATE CLEARWAY: 1100mm

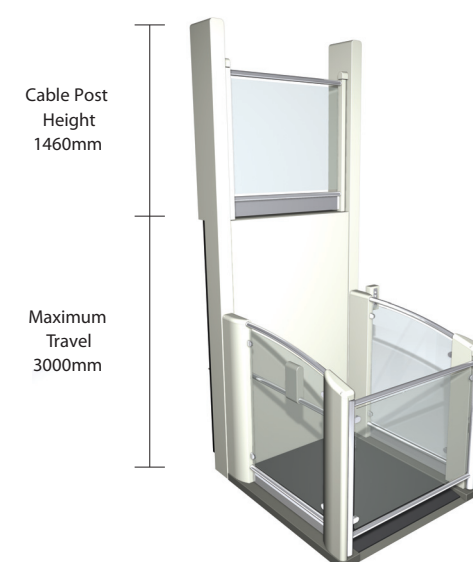

FEATURES AND BENEFITS

- > Travel up to 3m
- > Maximum capacity of 500kg
- > Modern lightweight design
- > Suitable for internal or external use (corrosion resistant)
- > Modular Aluminium construction
- > Stylish side panels and upper / lower gates in powder coated aluminium with Acrylic infills
- > Gates can be rehanded (opening direction changed) on site to suit
- > Simple to install and easy to service
- > 2-piece system
- > Integral pump - no need for remote pump unit minimising installation time
- > Battery powered (power pack integral to rail structure)
- > Can be reinstalled to a new location

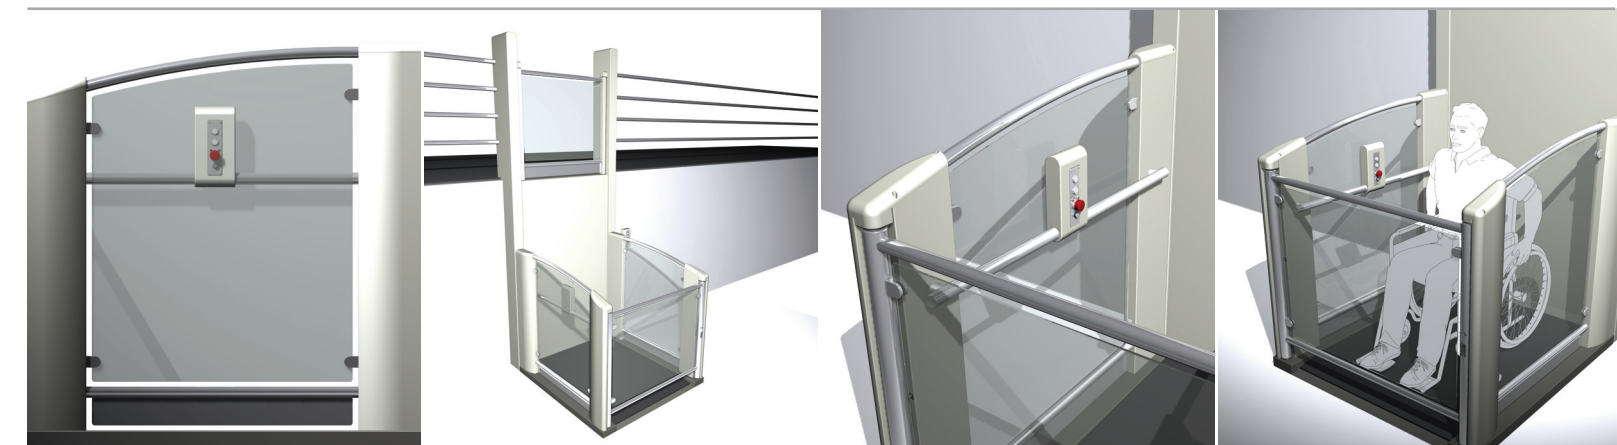

safety features

- > On board manual lowering system
- > Emergency release on upper and lower level gates
- > Auto reverse on upper and lower level gates
- > Full platform safety edge as standard

optional features

- > 3 platform sizes
- > Automatic upper level gate*
- > Automatic lower level gate*
- * mechanism can be rehanded on site if required*
- > Upgradable post installation to add automatic gates at a later date
- > Post mounted call station
- > Configurable control side
- > Optional RAL colours

specification

- > Easy access set-up switches
- > Drive: Direct acting hydraulic
- > Rated Speed: 0.1 meters per second
- > Power supply electrical requirements: 220/240-50/60 Hz - 13A single phase (max)
- > Dedicated RCD protected supply
- > Control system: Low voltage 24VDC
- > Operating temperature range: -10 to +40
- > Compliance standards: BS8300 & ISO9386-1 Machinery Directive 98/37/EC

