





Goodsmaster

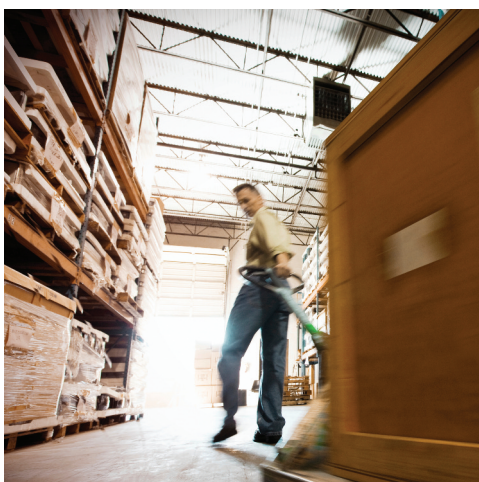

**The perfect solution to moving
heavy goods from floor to floor,
safely and easily**

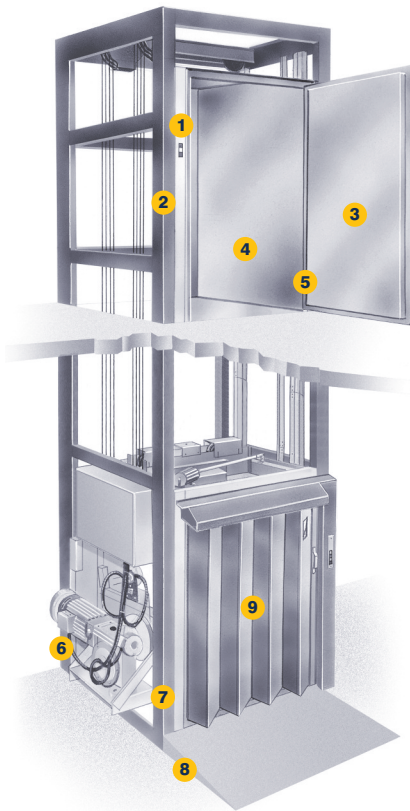

- 1 Robust push buttons, fully automatic control
- 2 Grey baked enamel framework for long life
- 3 Electronically interlocked hinged steel doors
- 4 Easy clean finish
- 5 Collapsible gate
- 6 Quiet, efficient, powerful motor
- 7 Structure supported frame
- 8 Low pit or optional ramp
- 9 Concertina gate (optional)

Our lifts make light work of moving heavy and bulky items. They protect you and your staff from the stresses and strains of manual handling. Installing a goods lift means you distribute goods quickly, efficiently and safely between floors. The lifts require only a shallow pit and come in their own structure, so they slot in almost anywhere and are economical to run.

Wide range

Whether you are lifting palletised goods, large roll containers, warehouse stock, furniture or bulky goods, heavy electrical or industrial equipment, trolleys, sack barrows or washing machines, you can choose from five models with 500kg, 750kg, 1000kg or 1500kg capacity to suit your exact lifting requirements.

Quick, simple installation

The lift operates inside a rapidly-erected, structure supported framework which is easy to install and requires minimal builder's work. No separate motor room or load-bearing shaft is needed, which helps to keep costs down.

Easy handling

Up to two-way entry (single or through car) on every floor to give most convenient access positions.

Entrances

A single hinged steel door is supplied as standard on 1060mm wide lift cars. Double hinged steel doors are supplied as standard on 1360mm and 1460mm wide lift cars. All are finished in grey baked enamel.

Concertina shutter leaf gates are available as an option on all goods only models.

Car entrance

A collapsible gate is fitted to the car entrance as standard.


Lift enclosure

Sheet steel motor-room cabinet and shaft cladding (not fire-rated) available as an optional extra.

Options:


Goodsmaster Plus
Allows up to two trained and competent attendants to accompany the load.

- Cabin control panel – key switch operation with constant pressure control and emergency stop switch
- Cabin entrance protection – full height light ray
- Landing doors with vision panels

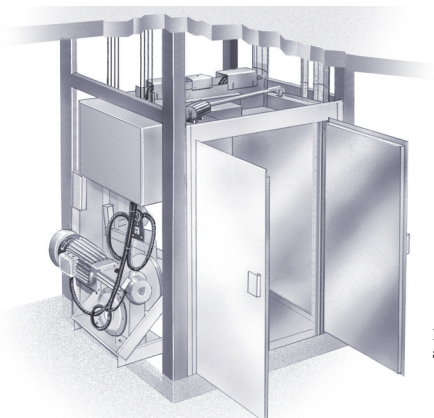

Double hinged steel doors supplied as standard on 1360mm and 1460mm wide lift cars

Technical specifications

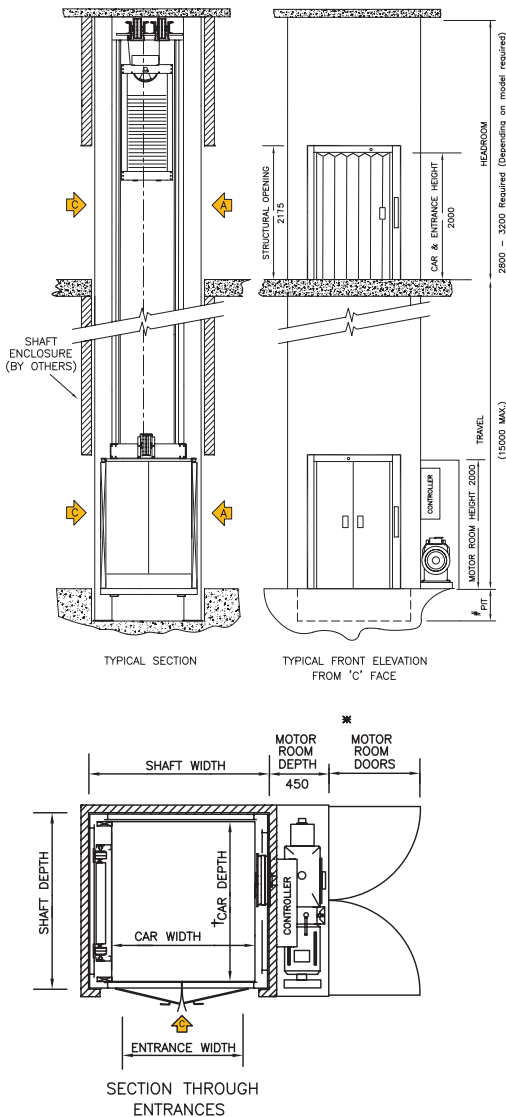

Choice of entrance arrangements

Single or through car entry on every floor is possible, giving maximum accessibility to the lift.



Goodsmaster Classic

Model	Capacity	Car Dimensions (w x d x h)	Entrance (w x h)	Shaft (w x h)	Pit Depth	Minimum Headroom
500B	500kg	1060 x 1230 [†] x 2000	1010 x 2000	1650 x 1500	150	2800
750B	750kg					2800
1000B	1000kg					2850
500EU	500kg	1360 x 1230 [†] x 2000	1310 x 2000	1950 x 1500	150	2800
750EU	750kg					2800
750S	750kg	1060 x 1730 [†] x 2000	1010 x 2000	1650 x 2000	150	2800
1000S	1000kg					2850
750XDS	750kg	1460 x 2130 [†] x 2000	1410 x 2000	2050 x 2400	150	2800
1000D	1000kg	1460 x 1430 [†] x 2000	1410 x 2000	2050 x 1700	150	2850
1500D	1500kg					3150
1000DS	1000kg	1460 x 1730 [†] x 2000	1410 x 2000	2050 x 2000	150	2850
1500DS	1500kg					3150

GOODS ATTENDANT – Goodsmaster Plus

Model	Capacity	Car Dimensions (w x d x h)	Entrance (w x h)	Shaft (w x h)	Pit Depth	Minimum Headroom
500B	500kg	1060 x 1230 [†] x 2000	1010 x 2000	1650 x 1500	150	2950
750B	750kg					2950
1000B	1000kg					2950
500EU	500kg	1360 x 1230 [†] x 2000	1310 x 2000	1950 x 1500	150	2950
750EU	750kg					2950
750S	750kg	1060 x 1730 [†] x 2000	1010 x 2000	1650 x 2000	150	2950
1000S	1000kg					2950
750XDS	750kg	1460 x 2130 [†] x 2000	1410 x 2000	2050 x 2400	150	2950
1000D	1000kg	1460 x 1430 [†] x 2000	1410 x 2000	2050 x 1700	150	2950
1400D	1400kg					3150
1000DS	1000kg	1460 x 1730 [†] x 2000	1410 x 2000	2050 x 2000	150	2950
1400DS	1400kg					3150

Load weighing is included as standard on all models

Notes:

All dimensions are nominal and in mm.

Concertina shutter leaf gates are available on the Goodsmaster Classic

Motor Housing

It will be necessary to provide access for servicing via lockable double hinged doors for the full depth of the lift shaft. These are available as an option.

Shaft Cladding

Non-fire rated shaft cladding is available as an option.

Pit or Ramp

The lift normally sits at floor level and would require a pit in the lowest floor. If you are unable to provide a pit, the lift can be installed to serve at 150mm above the lowest floor and a ramp will need to be provided by your builder or by us as an additional option.

† Car Depth

With a through car entrance arrangement, the inside car depth reduces by 30mm nominal.

N.B. Consideration must be given to protect any accessible space beneath the bottom of the lift shaft. Please contact us for further information.

B –	Single Hinged Door
EU –	Double Hinged Door
S –	Single Hinged Door
D –	Double Hinged Door
DS –	Double Hinged Door
XDS –	Double Hinged Door

We have recently introduced the Goodsmaster CD offering up to 2000kg load capacity, flexible car sizes, plus reduced pit and headroom – please contact us for more details.

Brief specification

Builder's work:

Preliminaries

Preliminary builder's work is straightforward. All that is normally required is an appropriately sized opening in each floor and a 415v electrical power supply.

We can provide your builder with exact builder's work details and drawings for your installation and, where necessary, liaise directly with the builder to ensure the whole operation runs smoothly.

After the installation

Your builder will need to provide an enclosure around the lift to protect against moving parts and conform with your local fire regulations, or we can supply non-fire rated cladding as an option. Permanent safe access to the motor must be provided to comply with current safety regulations. The lift installation and associated builder's work should comply with the latest Supply of Machinery (Safety) Regulations and be 'CE' marked accordingly.

Installation notes:

Headroom: This is the floor to ceiling height at the top floor served.

Shaft: These dimensions give the minimum inside shaft width and depth that must be provided to enable your lift to be installed.

Pit: The lift normally serves at floor level and would require a pit in the lowest floor. If you are unable to supply a pit, the lift can be installed to serve at 150mm above the lowest floor and a ramp will need to be supplied by your builder or as an option.

Load:	500kg, 750kg, 1,000kg, 1,400kg and 1,500kg
Car:	Constructed from mild steel sheeting; finished in a tough grey baked enamel with heavy duty vinyl covered floor
Landing Entrance	Single hinged steel door on 1060mm wide lift cars. Double hinged steel doors on 1350mm and 1460mm wide lift cars. Finished in grey baked enamel. Collapsible concertina gates are available as an option on the Goodsmaster Classic
Car Entrance Protection:	A collapsible gate is fitted to the lift car entrance(s) as standard on Goodsmaster Classic Full height light ray is fitted to the lift car entrance(s) as standard on Goodsmaster Plus
Mounting:	The lift is supplied in a structure-supported frame. A solid base and support at each floor is all that is needed from your building
Floors served:	Can serve up to 5 stops
Speed:	0.13 – 0.2m/s nominal
Travel:	Up to 15 metres of travel
Entry Choice:	Up to two entrances can be fitted on each floor, front and rear
Controls:	Fully automatic push button control, with call and despatch facilities at each entrance
Indicators:	"Lift arrival" and "lift occupied" indicators are fitted at each entrance for extra reassurance, together with an audible lift arrival buzzer
Motor/ Winding Unit:	Mounted on a bedplate fixed to the lift's structure. The motor drives a high quality reduction gearbox with 2:1 traction roping. Efficient and quiet in operation
Electric Supply:	380/415 Volt – 50Hz – Phase 3. A good earth but no neutral is required. A 16 amp isolator adjacent to the motor should be supplied for the lift by your electrician. For details, please ask for our builders work folder
Installation:	A 2-floor lift normally takes 7-10 days to install, depending on site conditions. Once the builder's work has been completed we then return to site to commission, test and 'CE' mark the lift. At this stage we will show you how to use the lift properly
Delivery:	A few weeks – please ask for details
Enclosure:	Available as an option (not fire rated)
Maintenance:	We recommend the lift is serviced and inspected every 3 months by competent lift engineers. This is to ensure efficient and reliable operation. We can arrange servicing after installation
Guarantee:	The lift is guaranteed for twelve months from completion of installation, subject to it being serviced regularly by our engineers
Policy:	We are continually developing and improving our range and reserve the right to alter specifications, dimensions and prices without prior notice
Safety:	Once installed, tested, commissioned and all the building work is complete, the lift will comply with the Essential Safety Regulations (ESRs) of the latest Supply of Machinery (Safety) Requirements, otherwise known as the Machinery Directive
Optional Extras:	Intercom system positioned at each landing entrance • Motor room enclosure • Sheet steel cladding in grey baked enamel • Variable car heights from 1800mm - 2400mm (standard @ 2000mm) • Shutter leaf landing gates

Elevators.ie

6F, Unit 6 KCR Estate, Dublin 12

Tel: +353 (0) 1 514 3766

info@elevators.ie

www.elevators.ie

